



M 80029 HSH wiring

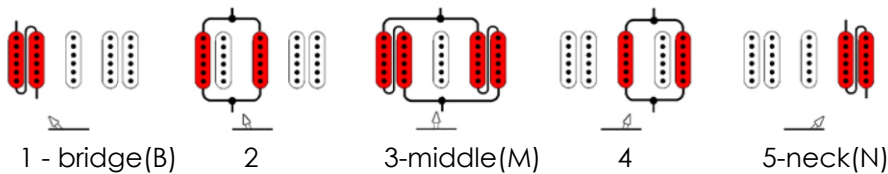

Switch positions:
1-Humbucker(B)

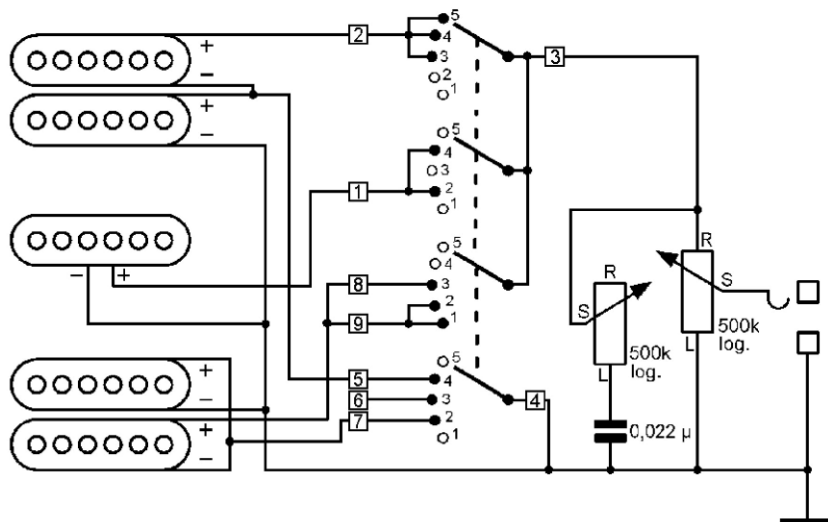


2-Humbucker(B single coil)+SingleCoil(M) - parallel

3-Humbucker(B)+Humbucker(N) - parallel

4-SingleCoil(M)+Humbucker(N) singlecoil)

5-Humbucker(N)

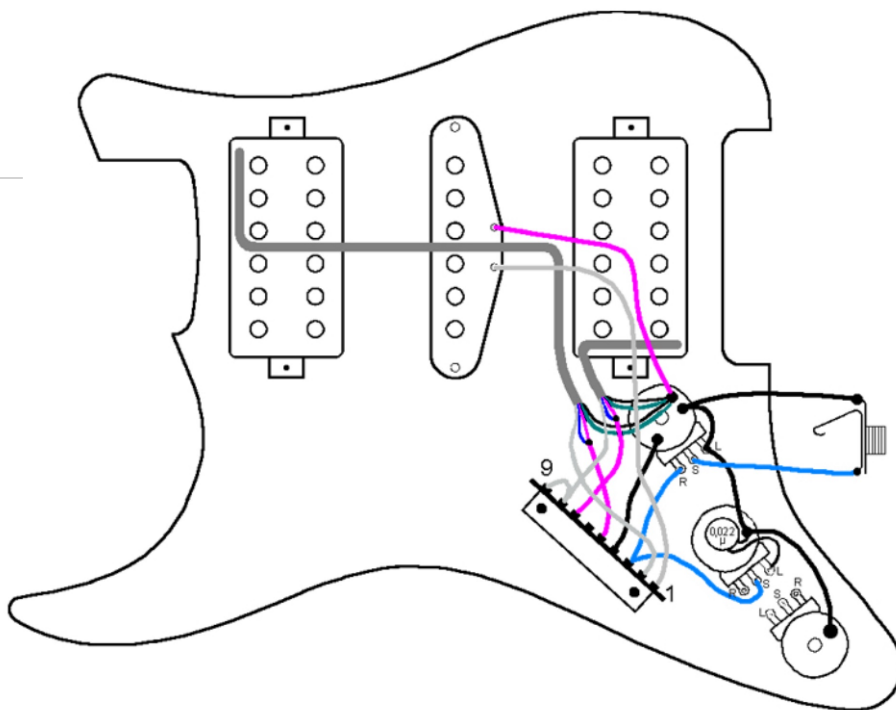

connections:

- 1- SingleCoil(M) Hot wire(+)
- 2- Humbucker(N) (outer coil+) Hot wire
- 3-Output
- 4-Ground
- 5-Humbucker(N)(inner coil+) + Humbucker(N)(outer coil-)
- 6-not used
- 7-Humbucker(B)(innercoil+)+ Humbucker(B)(outer coil-)
- 8-Humbucker(B)(outer coil+)
- 9-Humbucker(B)(outer coil+)
- >8 to 9/9 to 8 wire

wires to ground:

- solder pin 4 from the switch
- Humbucker(N)(inner coil-)
- Singlecoil(M)(-)
- Humbucker(B)(inner coil-)

MEC


Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46
D-08258 Markneukirchen
Tel : +49 (0) 37422 555 - 0
Fax : +49 (0) 37422 555- 9999
e-mail : info@warwick.de

	NAME	DATE
DRAWN		
CHK'D		A-01
Scale 1:1	SHEET 1 OF 5	A4

M 80029
Switch

Copyright
This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

M 80029 HS wiring

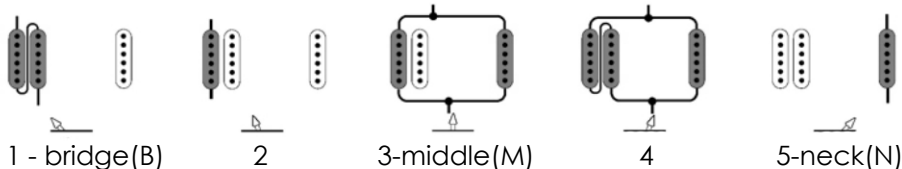


Switch positions:
1-Humbucker(B)

2-Humbucker(B) outer coil

3-Humbucker(B)outer
coil+SingleCoil(N) - parallel


4-Humbucker(B)+SingleCoil(N) -
parallel

5-SingleCoil(N)

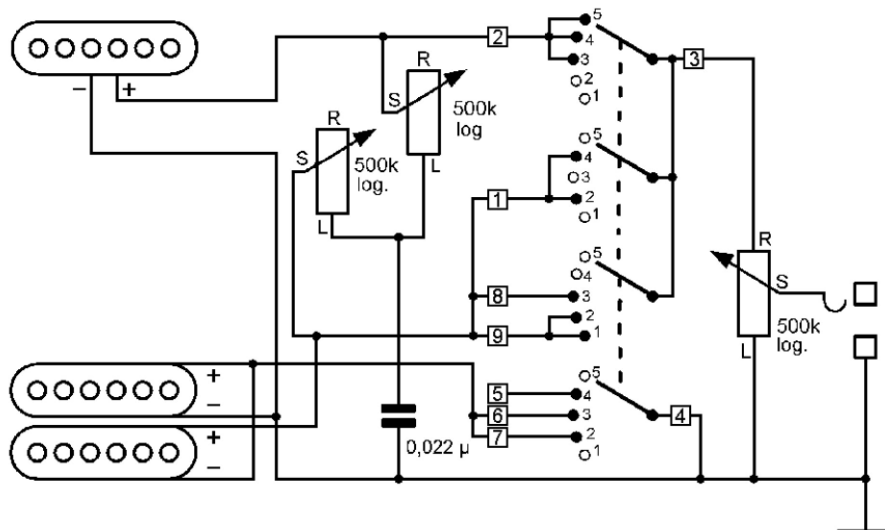

connections:
1- to 8 and 9, Humbucker(B) (outer
coil +)
2- SingleCoil(N) - Hot wire
3-Output
4-Ground
5-not used
6-to 7, Humbucker(B)(inner coil +)
7-to 6, Humbucker(B)(inner coil +)
8- to 9 and 1,Humbucker(B)(outer
coil+)
9- to 8 and 1,Humbucker(B)(outer
coil+)

wires to ground:
-solder pin 4 from the switch
-Singlecoil(N)(-)
-Humbucker(B)(inner coil -)

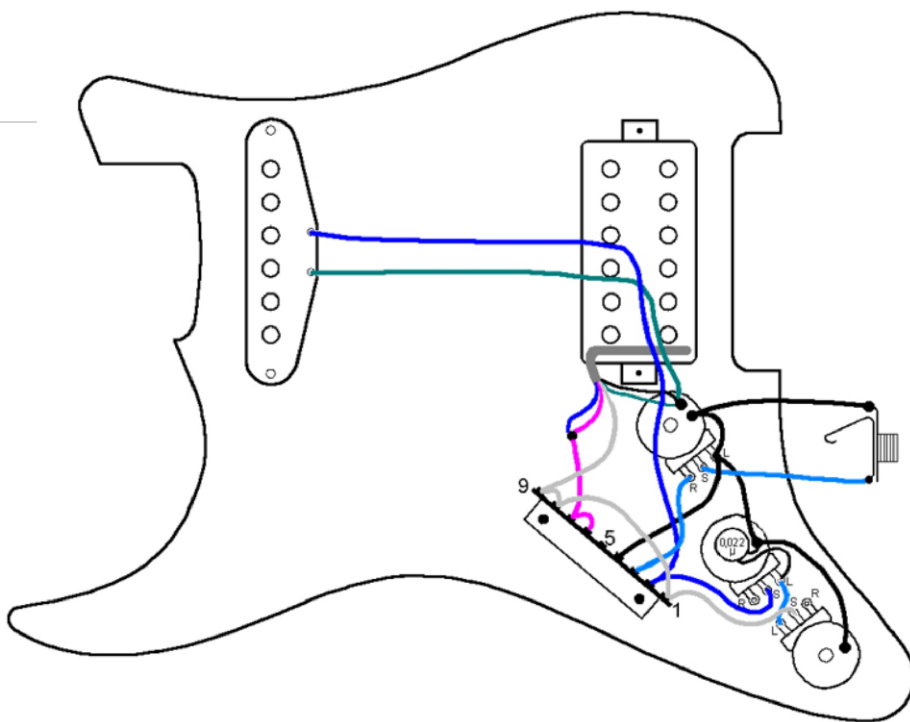

MEC


Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46
D-08258 Markneukirchen
Tel : +49 (0) 37422 555 - 0
Fax : +49 (0) 37422 555- 9999
e-mail : info@warwick.de

Copyright
This drawing is the property of Warwick Gmbh & Co
Music Equipment KG.
The information given on it is protected by
copyright and any form of copying
or reproduction is strictly forbidden.

M 80029
Switch

	NAME	DATE
DRAWN		
CHK'D		A-01
Scale 1:1	SHEET 2 OF 5	A4

M 80029 HS v2 wiring

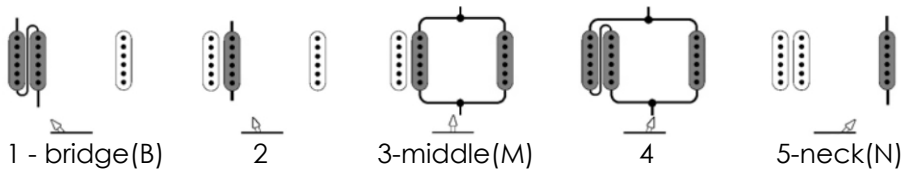



Switch positions:
1-Humbucker(B)

2-Humbucker(B) inner coil

3-Humbucker(B)inner
coil+SingleCoil(N) - parallel

4-Humbucker(B)+SingleCoil(N) -
parallel

5-SingleCoil(N)

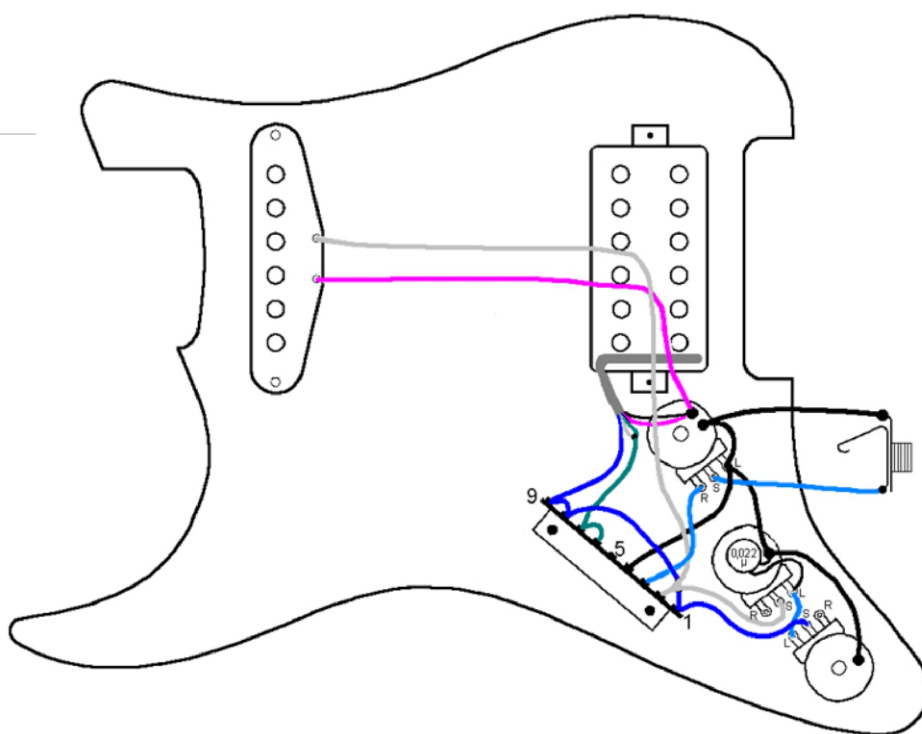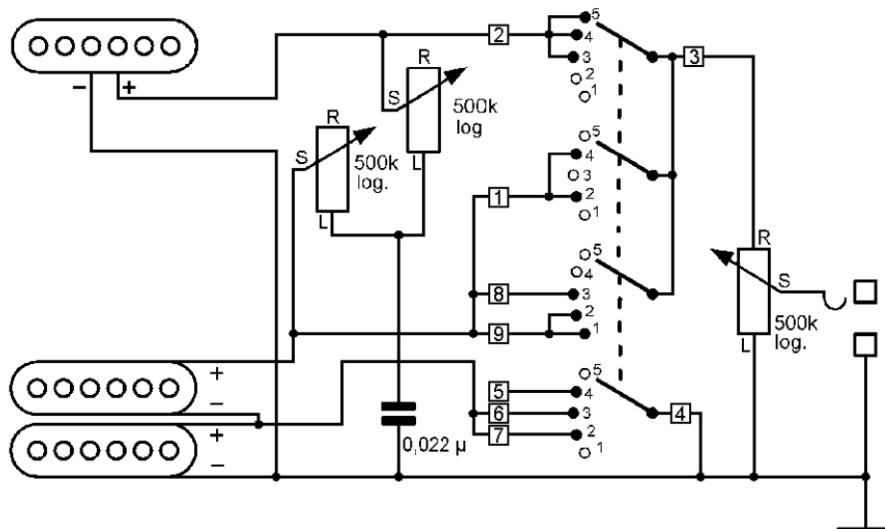

connections:

- 1- to 8 and 9, Humbucker(B) (inner coil +)
- 2- SingleCoil(N) - Hot wire
- 3-Output
- 4-Ground
- 5-not used
- 6-to 7, Humbucker(B)(outer coil +)
- 7-to 6, Humbucker(B)(outer coil +)
- 8- to 9 and 1,Humbucker(B)(inner coil+)
- 9- to 8 and 1,Humbucker(B)(inner coil+)

wires to ground:

- solder pin 4 from the switch
- Singlecoil(N)(-)
- Humbucker(B)(outer coil -)

MEC


Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46
D-08258 Markneukirchen
Tel : +49 (0) 37422 555 - 0
Fax : +49 (0) 37422 555- 9999
e-mail : info@warwick.de

	NAME	DATE
DRAWN		
CHK'D		A-01
Scale 1:1	SHEET 3 OF 5	A4

M 80029
Switch

Copyright
This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

M 80029 SH wiring

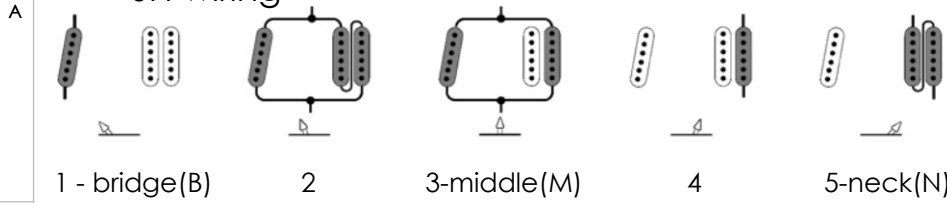


Switch positions:
1-SingleCoil(B)

2-SingleCoil(B) + Humbucker(N) - parallel

3-SingleCoil(B) + Humbucker(N)(outer coil) - parallel

4-Humbucker(N)(outer coil)

5-Humbucker(N)

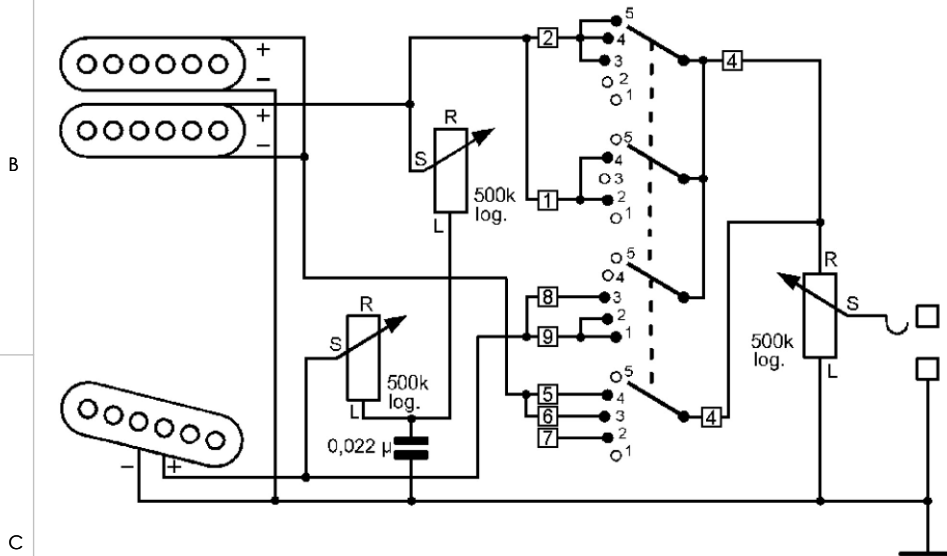


connections:

- 1- to 2, Humbucker(N) (inner coil +)
- 2- to 1, Humbucker(N) (inner coil +)
- 3- to 4, Output
- 4- to 3, Output
- 5- to 6, Humbucker(N)(inner coil -) + Humbucker(N)(outer coil +)
- 6- to 5, Humbucker(N)(inner coil -) + Humbucker(N)(outer coil +)
- 7- not used
- 8- to 9 ,SingleCoil(B)(+)
- 9- to 8 ,SingleCoil(B)(+)

wires to ground:

- Humbucker(N)(outer coil -)
- SingleCoil(B)(-)

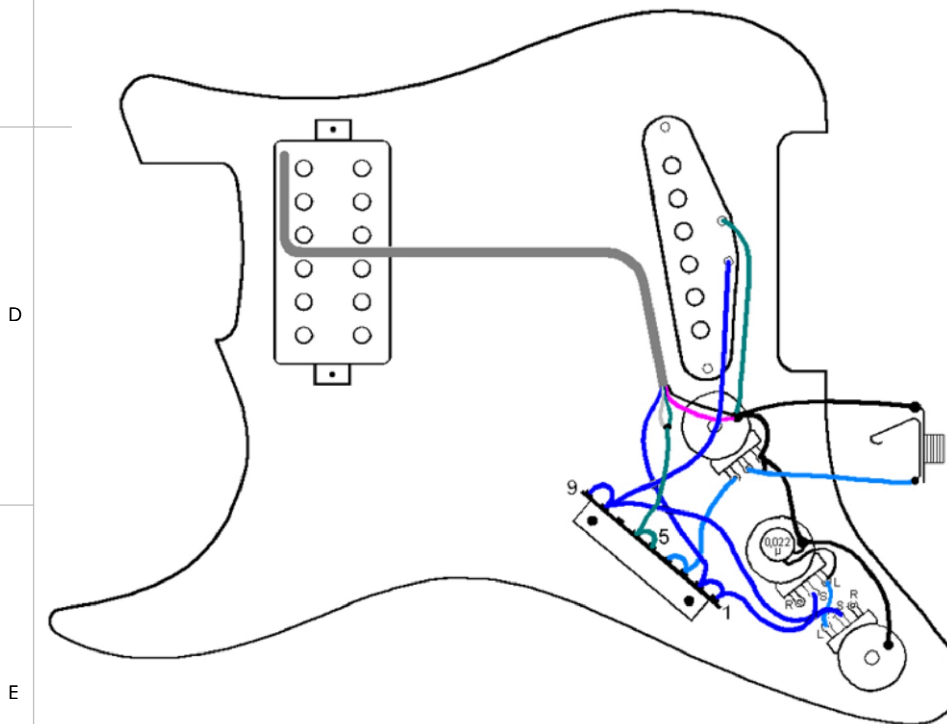

MEC


Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46
D-08258 Markneukirchen
Tel : +49 (0) 37422 555 - 0
Fax : +49 (0) 37422 555- 9999
e-mail : info@warwick.de

	NAME	DATE
DRAWN		
CHK'D		A-01
Scale 1:1	SHEET 4 OF 5	A4

M 80029
Switch

Copyright
This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

M 80029 SH v2 wiring

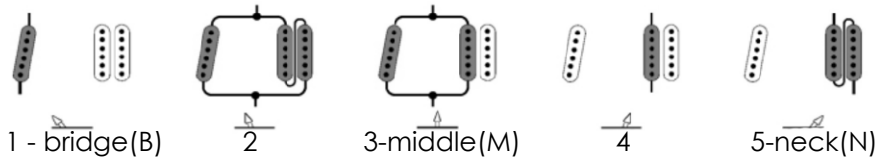


Switch positions:
1-SingleCoil(B)

2-SingleCoil(B) + Humbucker(N) - parallel

3-SingleCoil(B) + Humbucker(N)(inner coil) - parallel

4-Humbucker(N)(inner coil)

5-Humbucker(N)

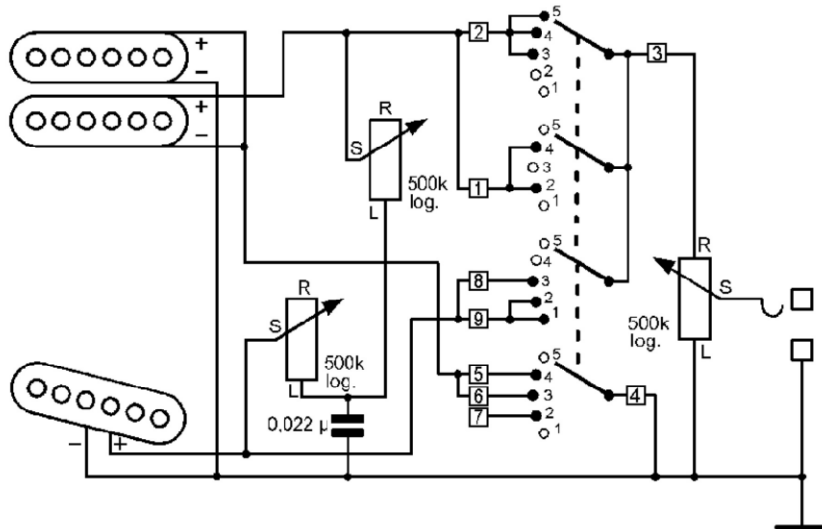


connections:

- 1- to 2, Humbucker(N) (inner coil +)
- 2- to 1, Humbucker(N) (inner coil +)
- 3- Output
- 4- Ground
- 5- to 6, Humbucker(N)(inner coil -) + Humbucker(N)(outer coil +)
- 6-to 5, Humbucker(N)(inner coil -) + Humbucker(N)(outer coil +)
- 7- not used
- 8- to 9 ,SingleCoil(B)(+)
- 9- to 8 ,SingleCoil(B)(+)

wires to ground:

- solder pin 4 from the switch
- Humbucker(N)(outer coil -)
- SingleCoil(B)(-)

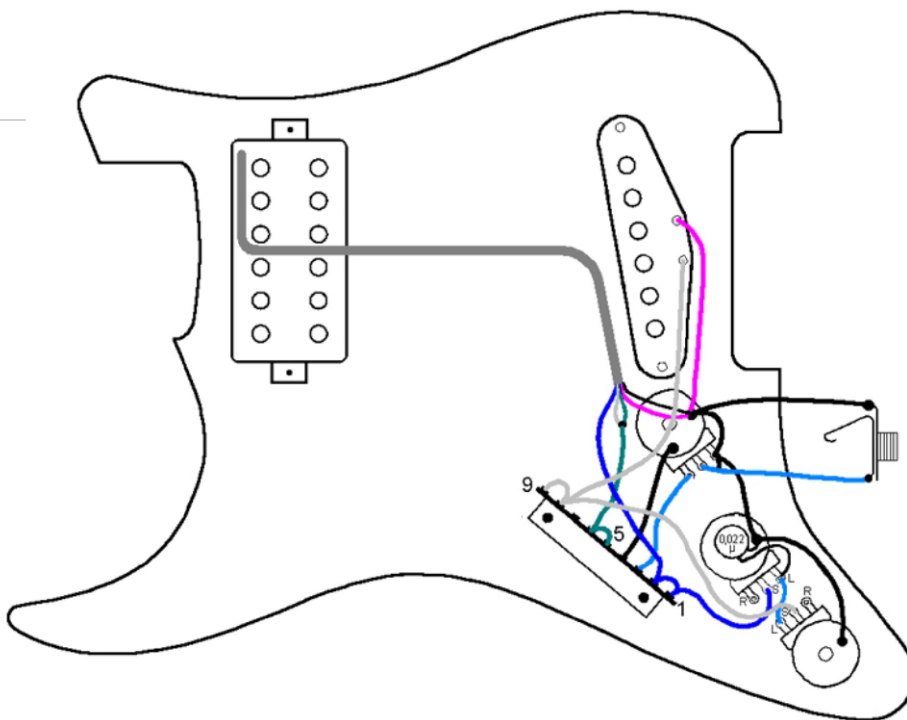

MEC

Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46
D-08258 Markneukirchen
Tel : +49 (0) 37422 555 - 0
Fax : +49 (0) 37422 555- 9999
e-mail : info@warwick.de

Copyright
This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

	NAME	DATE
DRAWN		
CHK'D		A-01
Scale 1:1	SHEET 5 OF 5	A4

M 80029
Switch