



INSTALLATION INSTRUCTIONS

FOR FIXED BRIDGE 3300
 SIX STRING SERIES




X : LOCATION OF (2) FRONT MOUNTING HOLES (USE CENTERLINE OF FRETBOARD).
 SCALE LENGTH MEASUREMENT FOR CORRECT INTONATION IS FROM
 CRITICAL CONTACT POINT (CCP) AT NUT AND TO THE CENTER OF
 SADDLE TRAVEL (CST).

Y : LOCATION OF (2) REAR MOUNTING HOLES (USE CENTERLINE OF FRETBOARD)
 ALIGNMENT LEFT & RIGHT FOR CORRECT STRING LOCATION ON
 FRETBOARD. (NOTE: L-R SADDLE ADJUSTMENTS ON BRIDGE).

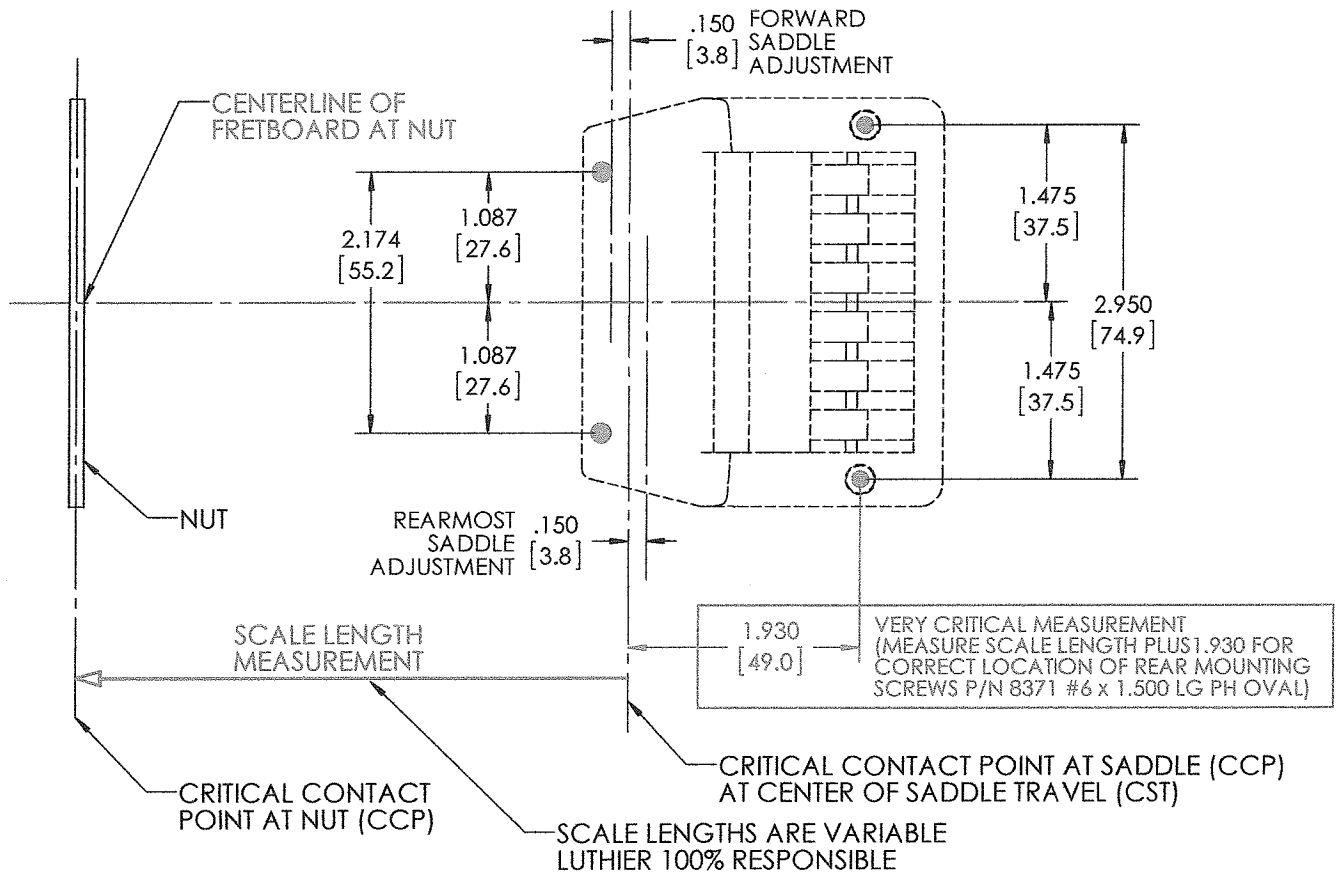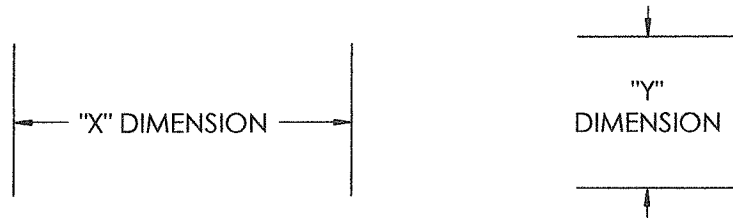

DWG is to offer assistance to a qualified Luthier. We do not guarantee 100% satisfaction on this DWG, therefore the Luthier is 100% responsible for the measurements and routings.	KAHLER INTERNATIONAL INC.		
	TITLE: LOCATION MEASUREMENTS ASSY: 3300		
	DWG. NO. 5793RIMA		
	DRWBY: TASC	DATE: 08/08/12	SCALE: 1:1

BRIDGE MOUNTING PLATE LOCATION AND HEIGHT MEASUREMENT FOR CORRECT STRING ACTION

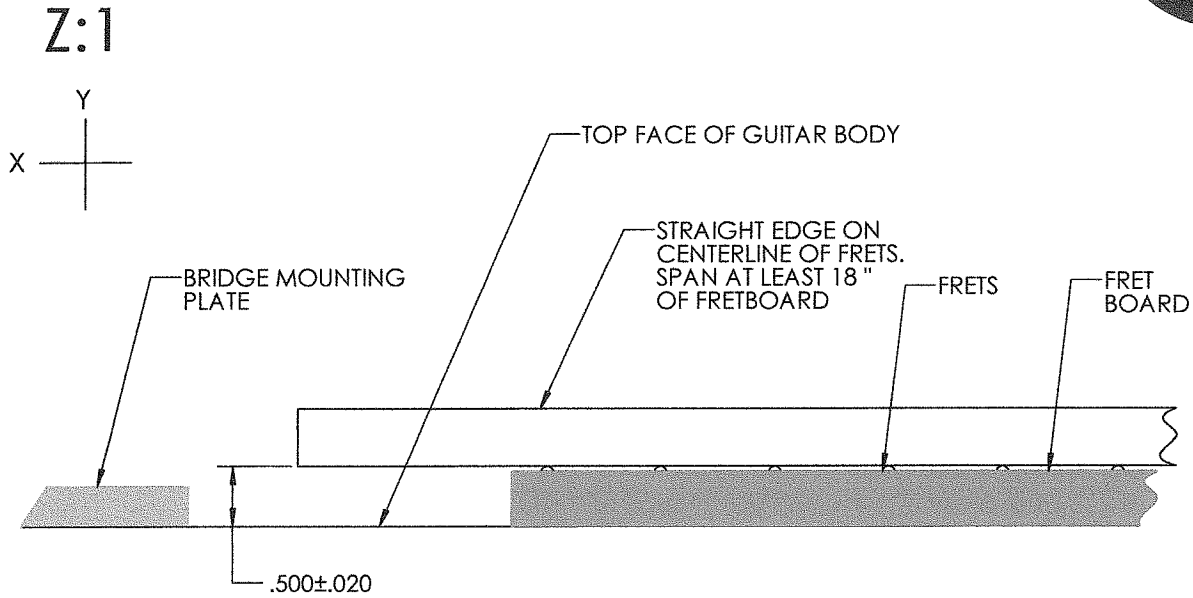

NOMINAL HEIGHT. IF GREATER, ADJUST NECK ANGLE OR ADD SHIMS UNDER BRIDGE PLATE.
 IF LESS, ADJUST NECK ANGLE OR ROUT AN INSET.

DWG is to offer assistance to a qualified Luthier. We do not guarantee 100% satisfaction on this DWG, therefore the Luthier is 100% responsible for the measurements and routings. "A GUIDE ONLY"	KAHLER INTERNATIONAL INC.		
	TITLE: ROUTING/FRET HT. MEASUREMENTS ASSY: 3300		
	DWG. NO. 5793RIMA		
	DRAWN: TASC	DATE: 03/21/11	SCALE: 1:1