




Without locking ring.

With standard locking ring.

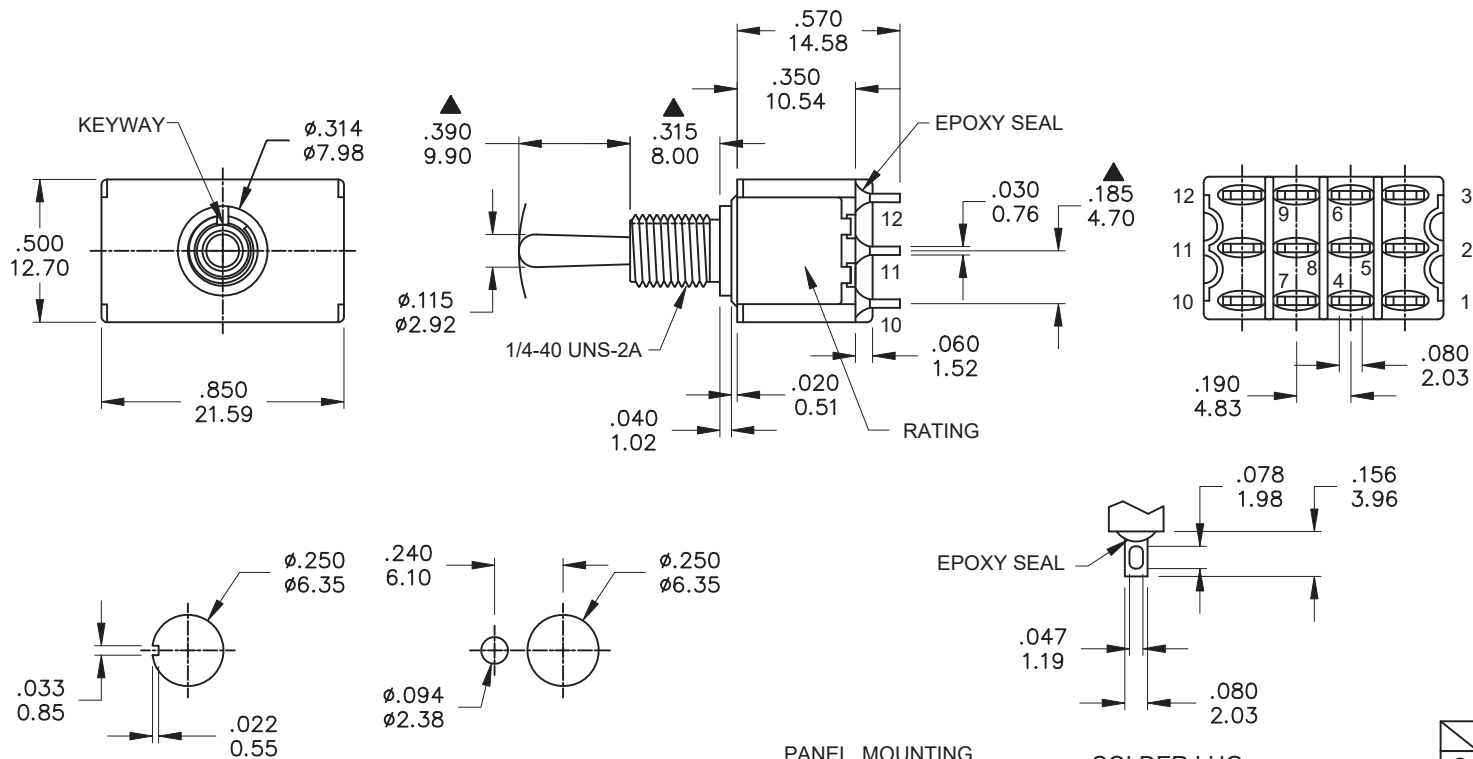

PANEL MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000 MΩ min.
DIELECTRIC STRENGTH: 1,000 Vrms min.@seal level.
OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Brass, Tin-Cobalt alloy over Ni plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Copper.
RoHS & Lead Free

Model No.	POS.1	POS.2	POS.3
1M46	ON	ON	ON
Term. Comm.	2-3,5-6 8-9,11-12	2-3,5-6 8-9,11-12	2-1,5-4 8-7,11-10
SCHEMATIC			

SWITCH FUNCTION

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	5 Amps @120 VAC or 28VDC
C	Gold over Silver	Gold over silver	2 Amps @250 VAC
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

Warwick Gmbh & Co Music Equipment KG
 Gewerbepark 46
 D-08258 Markneukirchen
 Tel: +49(0)37422 555-0
 Fax : +49 (0) 37422 555-9999
 e-mail : info@warwick.de

Copyright

This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
 The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

DRAWN

28/10/2024

M_80010_C_01

CHKD


MEC

A-01


Scale 1 : 1

SHEET 1 OF 1


A4

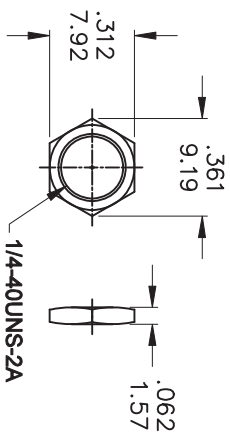

MNU-1M01A

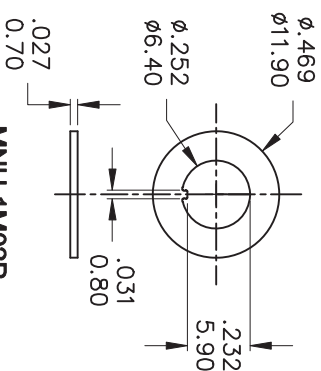

MNU-1M02P

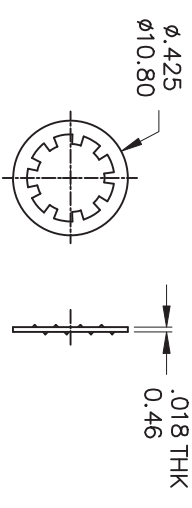

MNU-1M03

PART NO.	PART NAME	QTY
1 MNU-1M01A	1/4 INCH NUTS	2
2 MNU-1M02P	LOCKING RING	1
3 MNU-1M03	LOCKING WASHER	1



	NAME	DAE	M_8000	Warwick Gmbh & Co Music Equipment KG Gewerbepark 46 D-08258 Markneukirchen Tel: +49(0)37422 555-0 Fax: +49 (0) 37422 555-9999 e-mail: info@warwick.de
DRAWN	28/10/2024			
CHKD	MEC	A-01		
	Scale 1 : 1	SHEET 1 OF 1	A4	Copyright This drawing is the property of Warwick Gmbh & Co Music Equipment KG. The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.