

User's Manual

Minimal AUX Switch

Thank you for your purchase of the Minimal AUX Switch by One Control.

Aux Switch include two momentary, normal open footswitches. It is usually used for remote control of various equipment.

Scenario: It is used for synchronizing the tap tempo of two Eventide stomp boxes, switch preset numbers at the same time, and combine parameters as well as utilize the active / bypass switching.


- Specifications

Outputs:

2x 1/4" stereo (TRS) jack

Weight: 205 g/ 7.23 oz

Size: 112 (W)mm x 66 (D) mm x 48 (H) mm / 4.41" x 2.60" x 1.89"

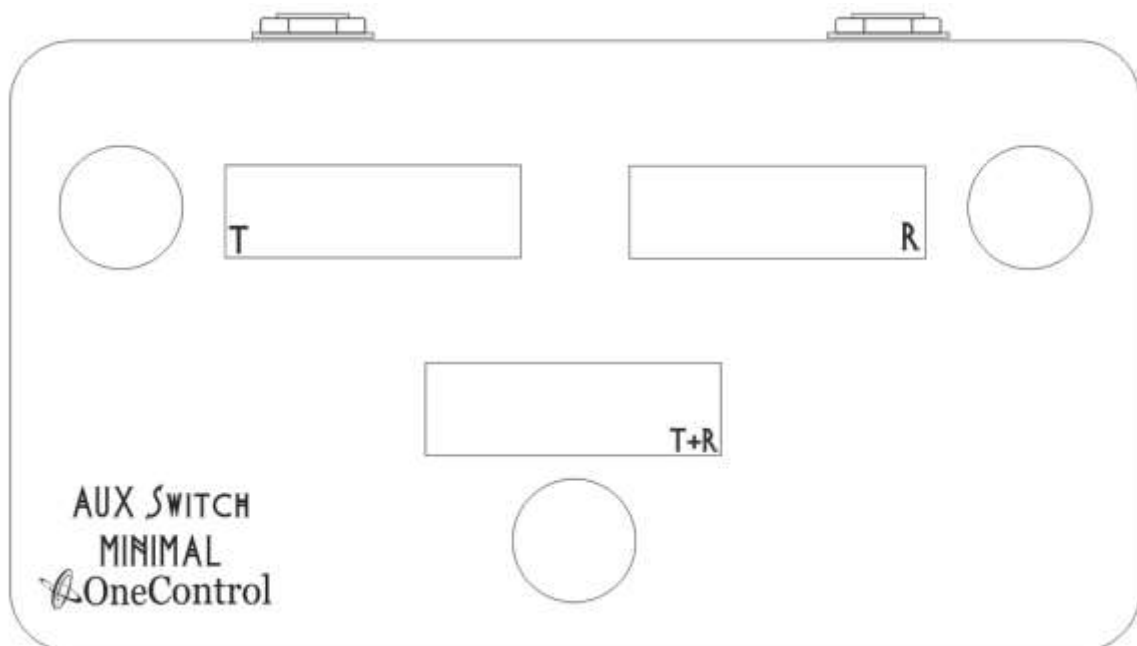

1/4" jacks:

Two stereo (TRS) 1/4" jacks are in parallel, they output the same signal when a footswitch is pressed.

T Footswitch:

The tip and sleeve of 1/4" jack will be short when this switch is pressed.

R Footswitch:

The ring and sleeve of 1/4" jack will be short when this switch is pressed.

T+R Footswitch:

The tip and sleeve, ring and sleeve, will be short at the same time when this switch is pressed.