




RATING:

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

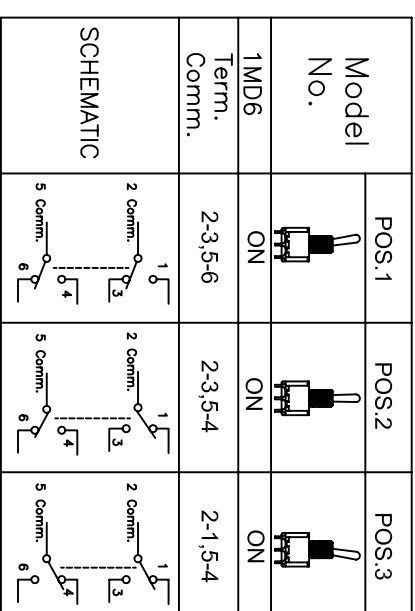

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. Initial @ 2-VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.




CASE: Diallyl phthalate (DAP) (UL94v-0).
ACTUATOR: Brass, chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.
SWITCH SUPPORT: Brass, Tin plated.



This drawing is the property of Warwick GmbH & Co

Music Equipment KG.

The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

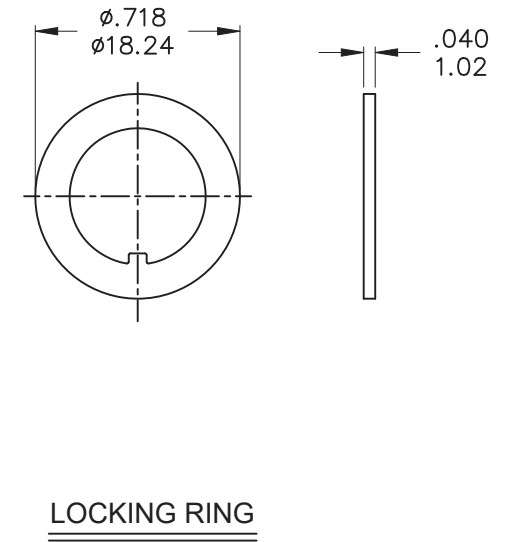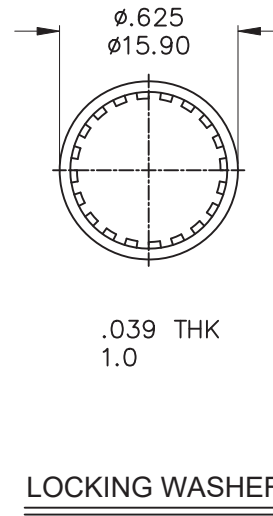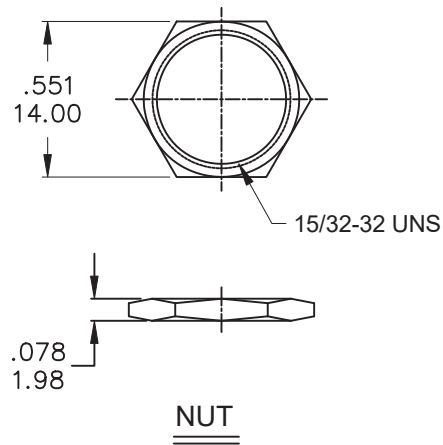

	PART NO.	PART NAME	Q'TY
1	MNU-1M07	15/32 INCH NUTS	2
2	MNU-1M08P	LOCKING RING	1
3	MNU-1M09	LOCKING WASHER	1



Warwick Gmbh & Co Music Equipment KG
 Gewerbepark 46
 D-08258 Markneukirchen
 Tel: +49(0)37422 555-0
 Fax: +49 (0) 37422 555-9999
 e-mail: info@warwick.de

Copyright

This drawing is the property of Warwick Gmbh & Co Music Equipment KG.
 The information given on it is protected by copyright and any form of copying or reproduction is stricly forbidden.

	NAME	DAE	M_8000
DRAWN	28/10/2024		
CHKD	MEC	A-01	
	Scale 1: 1	SHEET 1 OF 1	

A4