

MOOER

HORNET 15i ***15 Watt Combo***

Quick Guide

This is a quick guide. For more detailed manual, please enter www.moeraudio.com to download. If you need any help and tech support, please contact: support@moeraudio.com

感谢您选择魔耳乐器的产品, 此为快速指导手册, 帮助你简单快速获得产品使用信息, 非完整说明书, 如需完整说明书, 请登录魔耳官网www.moeraudio.com, 进入产品页面下载

CONTENTS

PRECAUTION-----	01
FEATURES-----	02
TOP PANEL LAYOUT-----	03-04
CONNECTIONS-----	05
INSTRUCTIONS-----	06-07
SPECIFICATIONS-----	08

PRECAUTIONS

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

Please connect the DC POWER Supply to an AC outlet of the correct voltage. Please be sure to use only an AC adapter that supplies 18V ($\pm 5\%$) DC, center negative, 2000mA current draw. Unplug the AC power adapter when not in use or during electrical storms.

Connections

Always turn off the power of the amplifier and other devices before setting up the connection to avoid malfunction and unexpected damage. In addition, before you move the amplifier, please ensure the amplifier is powered off, and disconnect it from the other device.

Please power off the amplifier, and unplug the power supply, if the amplifier is idle for a long time.

Please do not use the amplifier during an electrical storm, power off the device and unplug the power cord from the socket.

Location

● To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Excessive dusty or dirty location
- High humidity or moisture
- Extreme temperature or humidity
- Magnetic fields
- Strong vibrations or shocks

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth. Do not use abrasive cleaners, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.




Operation

- Please do not toggle the switch, rotate the knob heavily.
- Please do not let the paper scrap, metal debris, or other sundries falls inside the unit.
- Please do not let the unit fall from a high level, push, or strike the unit heavily.
- Please do not modify the unit without authorization.
- For repairing service, please contact the MOOER support team for more information.

FEATURES

- Digital modelling amplifier based on the MOOER Intelligent AMP system.
- 52 amp models created with MNRS technology, and 49 classic and experimental effects.
- 15-watt stereo amplifier with a 6.5 inch loudspeakers.
- 40 drum machine varieties and 10 metronomes.
- 80-second looper that can sync with the drum machine.
- Comes with tuner for tuning your instrument easily.
- Specialized MOOER iAMP App for complete effects editing, firmware updates, and the ability to upload/download tones from MOOER Cloud.
- Support for wireless footswitch control.
- Bluetooth 5.0 high quality audio input for audio playback or practice.
- USB-C port for high-quality audio recording and playback.

TOP PANEL LAYOUT

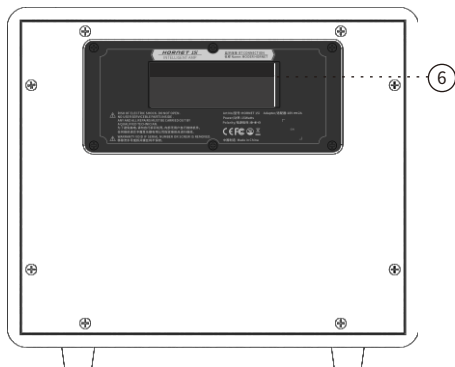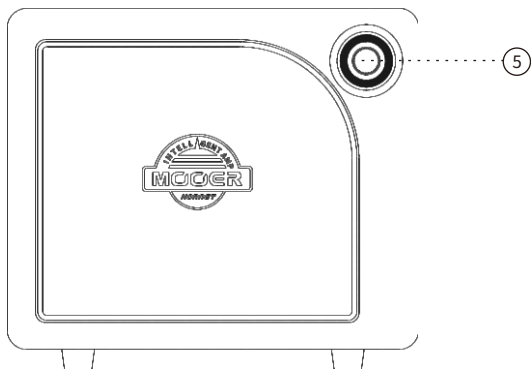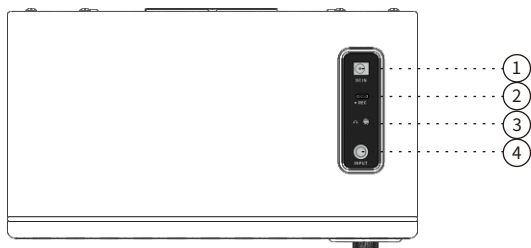

1 DC IN

Connect to power supply.

2 USB-C

For OTG direct recording and audio playback.

3 HEADPHONE

3.5mm TRS headphone jack for headphone connection.

Notes: The speaker will be muted when the headphone is plugged into the headphone jack.


4 INPUT

6.35mm TS instrument input jack for connecting to guitar or any other electric instrument.

5 Super Knob

6 Handle

CONNECTIONS

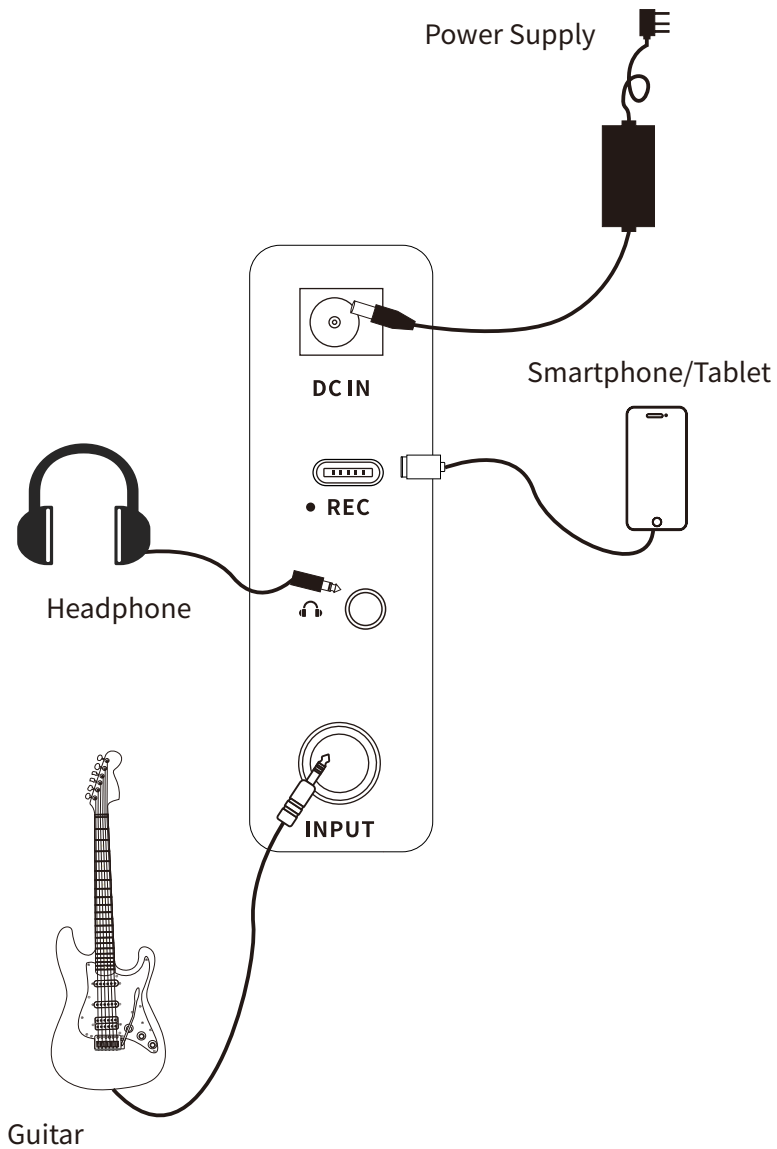

INSTRUCTIONS

- 1 Power Supply**

Plug the power cord to the DC IN. Recommend to use 18V 2.0A original power supply to avoid the unexpected noise or damage.
- 2 Connect to Instrument**

6.35mm TS instrument input jack for connecting to guitar or any other electric instrument.
- 3 Power On**

Rotate the Super Knob clockwise until it gets “Click” and the LED of the knob illuminates for power On; then rotate the Super Knob counterclockwise until it gets “click” for power Off.
- 4 Volume Control**

Rotate the Super Knob clockwise to turn up the volume level when the amplifier is On; rotate the Super Knob counterclockwise to turn down the volume level.
- 5 Preset Switching**

Press the Super Knob to switch between four preset patches in the currently selected preset bank. The color of the knob LED will indicate currently selected preset patches (BLUE, GREEN, PINK, and RED for preset slots A, B, C, and D).

6 OTG Recording

The DH15i has a USB-C port for OTG direct recording. Please connect your smartphone, tablet, or any other mobile device with Hornet 15i via the USB-C port through an OTG cable for direct recording.

Notes: The USB port is designed for direct recording via your mobile device. It cannot play the role of the professional audio interface for low-latency recording. If you would like to use it in the DAW on the Windows platform, ASIO audio drivers are needed, which could lead to compatibility issues.

Bluetooth Playback

Turn on the Bluetooth function in your mobile device, find the “Hornet 15i” and connect it. Then you can use the Hornet 15i for audio playback via Bluetooth.

7 Download MOOER iAMP App

Hornet 15i is a MOOER amplifier built on the iAMP intelligent amplifier platform, it supports MOOER iAMP App control via Bluetooth for tone editing, preset selecting, and downloading or uploading the preset files. Please enter Google Play or Appstore for downloads.

SPECIFICATIONS

Rates power:	15-watt class D amplifier
Mono/Stereo:	Mono
Speaker:	1*6.5-inch customized full-range flat-response speaker
Frequency Range:	20Hz-20kHz
Num. of effects:	52 amp models, 49 effects (dynamic /distortion/modulation/reverb)
Looper:	80-second stereo looper
Wireless footswitch:	Support
Charging requirements:	18V 2.0A
Bluetooth:	Bluetooth audio playback and App control
USB digital audio:	OTG audio recording, OTG audio playback
Input jack:	1/4" audio input jack, 2.2Meg ohm
Headphone:	1/8" audio input jack, 32ohm
Dimensions:	290 (D) x 173 (W) x 255mm (H)
Weight:	3kg
Accessories:	Power supply, quick guide