

MOOER

**PRIME P1
INTELLIGENT PEDAL**

Owner's Manual

Content

Precautions-----	01
Features-----	02
Layout-----	03-04
Instructions-----	05-06
Connection-----	07-08
Specification-----	09

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

- Please use a power supply that meets UL, CSA, VED, or CCC standards
- Please use the power supply that meets manufacturer's power requirement
- Please unplug the power supply when the device is turned off or during a thunderstorm
- Please do not expose the device which has battery power to heat or let it overheat
- If battery leakage occurs, please do not touch the liquid with your skin or eye. If you do come in contact, please see a doctor
- The battery included with the device may cause fire or chemical burns if handled improperly

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Excessive dusty or dirty location
- High humidity or moisture
- Extreme temperature or humidity
- Magnetic fields
- Strong vibrations or shocks

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth. Do not use abrasive cleanser, cleaning alcohol, paint

Features

- Eliminates the need to carry a massive power supply or deal with complicated user interfaces. Simply set up your effects chain and jump into your practice session or performance.
- Based on MOOER's unique MNRS technology, allowing for high-quality digital amp models and effects with a small form factor.
- Supports USB-OTG for live streaming or quick video recording.
- Download the free mobile app to easily edit your tones and share them with others as well as download different effects modules and tools to expand your own tonal possibilities
- Supports MOOER F-series wireless footswitches for preset switching and looper/drum machine control.
- Bluetooth audio playback for practice and jamming.

Layout



01. CONTROL

Control Knob with LED indicator. Rotate to adjust volume level. Press to switch between different preset patches.

02. INPUT

Input jack for instruments

03. OUTPUT

Output jack for main output

04. PHONES

Headphone output jack

05. USB

USB charging/OTG port

06. LED

Charging Indicator

Instructions

01. ON/OFF

Press and hold the Control button to power on/off the unit. The button LED will be turned on or off to indicate current status..

02. Select Preset Tone

Press the CONTROL knob to switch between A/B/C/D preset patches. The LED of the CONTROL knob will turn Blue/Green/Yellow/Red to indicate the selected preset.

03. Adjust Output Volume Level

When the device is on, rotate the CONTROL knob to adjust the output level of the unit. The brightness of the LED will indicate the volume level, with brighter corresponding to a higher volume level.

04. Bluetooth Playback

Turn on the Bluetooth function of your phone and select "Prime Audio" to pair. You can then play the audio track from your phone with the Prime P1 directly.

05. USB Audio

Prime P1 support OTG function to work with smart phone/tablet for direct recording.

*Notes: Please use USB-C to USB-A cable for OTG recording.

06. Charging

Prime P1 has a built-in rechargeable lithium-ion battery. When the battery life is low, the LED of the CONTROL knob will blink slowly. The Prime P1 supports charging via smart phone adaptor/power bank/USB port of computer. While charging, the charging indicator will turn on with Red indicating charging and Green to indicate charging complete.

*Notes: Please use USB-C to USB-A cable to charge.

07. Wireless Footswitch (Purchase separately)


Prime P1 supports MOOER F-series wireless footswitch. Users can utilize the wireless footswitch to control many functions of the unit. Before using the wireless footswitch for the first time, you must pair it with the Prime P1. Please check out the " ? " on the Prime App home page on pairing under "Pedal Connection"

08. Prime App


Users can download and install the Prime App to their mobile device from the Google Play/iOS application store. Users can edit preset patches, share tones with other users, or use the built-in tools such as tuner/drum machine/metronome/looper. Apart from that, you can download and install different effects modules in the Prime App and apply them to your P1. For more information, please download and install the Prime App.

Connection

Normal

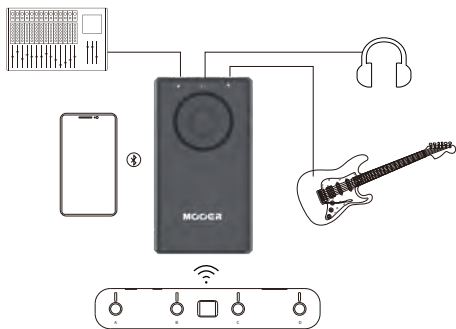

USB Recording

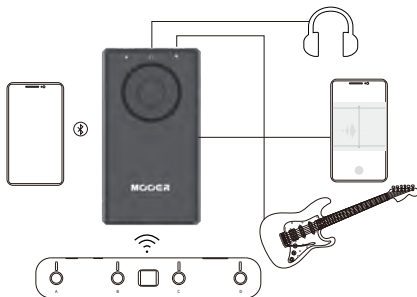

Specifications

Input:	1/4" 2 M Ω
Output:	1/4" 100 Ω
Headphone output:	1/8" 32 Ω
USB cable type:	USB-C to USB-A cable
Bluetooth version:	5.0
Battery Capacity:	1900mAh
Battery Life:	4.5 hours
Charging Requirement:	DC 5V/1A
Wireless Control:	2.4G
Weight:	100g
Dimensions:	99.3mm (D) * 55mm (W) * 21mm (H)
Accessories:	Quick guide, USB-C to USB-A cable, Nylon bag.

***Disclaimer: Parameter updates will not be notified separately.**

MOOER
www.moeraudio.com

SHENZHEN MOOER AUDIO CO. LTD
6F, Unit D, Jinghang Building, Liuxian 3rd Road,
Bao'an 71 District, Shenzhen, China. 518133
Made in China